



APPLICATION

Building Management Systems (BMS),
Access Control Instrumentation.

DESIGN

Conductor: Tinned Copper Wire, Flexible

Insulation: Foam PE

Pair 1: White / Blue + Blue / White

Pair 2: White / Orange + Orange / White

Pair 3: White / Green + Green / White

Pair 4: White / Brown + Brown / White

Colour Code: Pair 1: White / Orange + Orange / White

Core 1: Blue / White

Cabling: N Pairs twisted together

Screen : Aluminium / Polyester 115% Coverage


Drain Wire: Tinned Copper wire

Braid: Tinned Copper wire

Sheath Material: Halogen Free, Flame Retardant
(HFFR/LSZH), PVC. Standard colour: Purple

Standard Put-up Length: 305 Meters

Cross Section Drawing

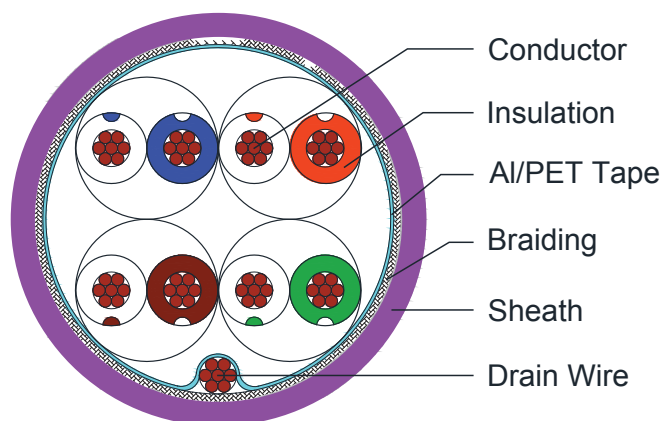

Physical Characteristics

Part Number	VFST122L/P B	VFST222L/P B	VFST322L/P B	VFST422L/P B
Number of Pairs	1	2	3	4
Conductor Gauge (AWG)	22			
Conductor Configuration (AWG)	7 x 30			
Nom. Radial Thickness Insulation (mm)		0.6		
Drain Wire Size (AWG)	24 (7 x 32)			
Coverage Braid (%)	65			
Nominal Radial Thickness Sheath (mm)	0.8			
Nom. Overall Diameter (mm)	6.1	8.0	9.3	10.3
Operating Temperature (C°)	-25 / +75			
Max. Pulling tension (N)	265	355	400	445
Min. Bend Radius (Install) (mm)	60	80	90	105
Nominal Cable Weight (kg/km)	46.7	76.7	97	119.1

Electrical Characteristics

Part Number	VFST122L/P B	VFST222L/P B	VFST322L/P B	VFST422L/P B
Number of Pairs	1	2	3	4
Max. DC Resistance Conductor (Ω/km)	57.4			
Max. DC Resistance Screen (Ω/km)	20			
Nominal Impedance (Ω)	120			
Capacitance core to core (pF/m)	34	35	38	38
Capacitance core to rest. (pF/m)	65	66	69	69
Nominal Attenuation at 1 Mhz (db/100m)	2.06			
Max. Recom. Current @ 25°C (Amps)	2.7			
Max. Operating Voltage (Vrms)	300			

Reference Standards

(BS) EN 50290-2	IEC 61034, IEC 60754 - 1 & 2
IEC 60228	RoHS directives
IEC 60332-1	

Ordering Information

Part Number	Description
VFST122LB	RS-485 1 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST222LB	RS-485 2 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST322LB	RS-485 3 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST422LB	RS-485 4 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST122PB	RS-485 1 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC
VFST222PB	RS-485 2 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC
VFST322PB	RS-485 3 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC
VFST422PB	RS-485 4 Pair 22 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC