



APPLICATION

Building Management Systems (BMS),
Access Control Instrumentation.

DESIGN

Conductor: Tinned Copper Wire, Flexible

Insulation: Polyethylene (PE)

Pair 1: White / Blue + Blue / White

Pair 2: White / Orange + Orange / White

Pair 3: White / Green + Green / White

Pair 4: White / Brown + Brown / White

Cabling: N Pairs twisted together

Screen : Aluminium / Polyester 100% Coverage


Drain Wire: Tinned Copper wire

Braid: Tinned Copper wire

Sheath Material: Halogen Free, Flame Retardant
(HFFR/LSZH), PVC. Standard colour: Purple

Standard Put-up Length: 305 Meters

Cross Section Drawing

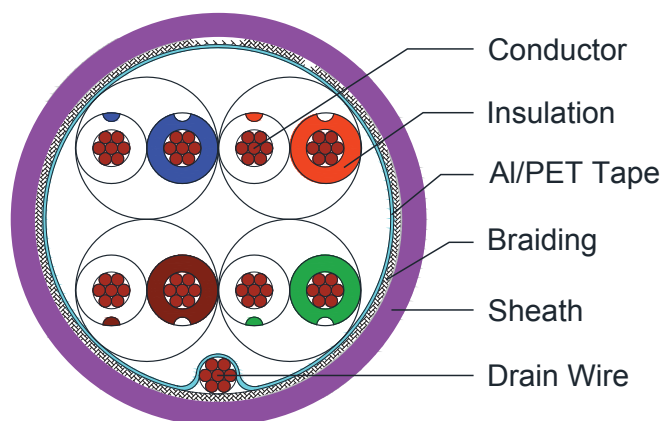

Physical Characteristics

Part Number	VFST124L/P B	VFST224L/P B	VFST324L/P B	VFST424L/P B
Number of Pairs	1	2	3	4
Conductor Configuration (AWG)	24 (7 x 32)			
Nom. Radial Thickness Insulation (mm)	0.6			
Drain Wire Size (AWG)	24 (7 x 32)			
Coverage Braid (%)	90			
Nominal Radial Thickness Sheath (mm)	0.8			
Nom. Overall Diameter (mm)	5.9	8.6	9.3	10.4
Operating Temperature (C°)	-25 / +75			
Max. Pulling Tension (N)	320	460	485	766
Min. Bend Radius (Install) (mm)	59	86	93	104
Nominal Cable Weight (kg/km)	49	92.6	114.4	143.2

Electrical Characteristics

Part Number	VFST124L/P B	VFST224L/P B	VFST324L/P B	VFST424L/P B
Max. DC Resistance Conductor (Ω/km)		88		
Max. DC Resistance Screen (Ω/km)		1.5		
Nominal Impedance (Ω)		120		
Capacitance core to core (pF/m)	32	43	43	43
Capacitance core to rest. (pF/m)	70	87	87	87
Nominal Attenuation at 1 Mhz (db/100m)		2.6		
Nominal Velocity of Propagation (1%)		66		
Max. Recom. Current @ 25°C (Amps)	2.1	1.54	1.54	1.54
Max. Operating Voltage (Vrms)		300		

Reference Standards

(BS) EN 50290-2	IEC 61034, IEC 60754 - 1 & 2
IEC 60228	RoHS directives
IEC 60332-1	

Ordering Information

Part Number	Description
VFST124LB	RS-485 1 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST224LB	RS-485 2 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST324LB	RS-485 3 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST424LB	RS-485 4 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, LSZH
VFST124PB	RS-485 1 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC
VFST224PB	RS-485 2 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC
VFST324PB	RS-485 3 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC
VFST424PB	RS-485 4 Pair 24 AWG Tinned Copper Shielded Cable Braiding with Drain Wire, PVC